



EXCEL[®] HAND AND HAIR DRYERS

MR MANUFACTURER

THE QUALITY LEADER

Excel Dryer Corporation manufactures the industry's finest quality hand and hair dryers.

For over 30 years, Excel's full line of **American Made** dryers have provided cost effective hand and hair dryers for schools, hospitals, office buildings, factories, restaurants, hotels, stadiums, movie theatres and health clubs.

The company is committed to satisfying customers' needs by focusing on the continuous improvement of its products and services. At Excel, quality is a way of life. Nothing else is acceptable.

PP PRODUCT PRESENTATION

"Hands On"[®] / "Hands Off"[®]

Selecting your choice of hand and hair dryer is as easy as saying "Hands ON"[®] or "Hands OFF"[®]. Excel features its traditional push button operated "Hands ON"[®]

"HANDS ON"[®] PUSH BUTTON HAND AND HAIR DRYERS

OP OVERALL PRODUCT DATA




76-W, H76-W
Surface Mounted
white epoxy paint cover



76-C, H76-C
Surface Mounted
chrome plated cover



R76-W, RH76-W
Recess Mounted
white epoxy paint cover

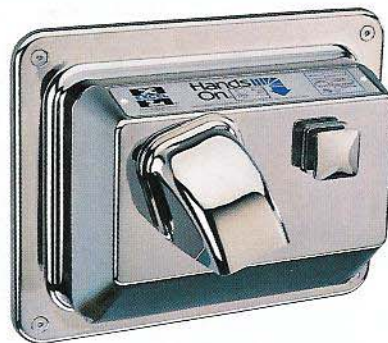

R76-C, RH76-C
Recess Mounted
chrome plated cover

DESCRIPTION

Excel's "Hands ON"[®] dryers boast a long standing reputation for quality and reliability. The "Hands ON"[®] series offers a choice of a surface or recessed wall mounting.

"Hands ON"[®] dryers are engineered to provide twice the service free life of other dryers, and are backed by a **Ten Year Unlimited Warranty**, including damage due to accidents, misuse or vandalism.

FEATURES

- "Hands ON"[®] dryers utilize a maintenance free brushless motor, capacitor initiated for quick starts.
- The air nozzle revolves a full 360 degrees providing easy hand and face drying. The air nozzle can also be fixed into a stationary downward position by means of a simple on-sight adjustment.

"Hands On"[®] models can be specified as Hair Dryers.

MECHANISM

- The motor is capacitor initiated, brushless type (for longer life and quiet operation), 1/10 H.P., 3450 R.P.M. with self lubricated bearings. It is insulated by a resilient mounting and protected by a self resetting thermal switch.
- The heating element produces an air temperature of 145°F at a 72°F ambient room temperature at the outlet. It is protected by an automatic resetting circuit breaker (25 Amp).
- The timer is operated by a completely sealed motor which will operate the hand dryer for 30 seconds after actuation. Hair dryers operate for 3 minutes after actuation.

Quantity Recommendation and Suggested Mounting Heights

One dryer for every two washbasins is sufficient for most applications. If restroom traffic is unusually heavy, we suggest one dryer per washbasin in small installations, and two dryers for every three washbasins in larger installations. When a 54" round-type washbasin is used, we suggest four to five dryers. In multiple installations, one dryer should be mounted at recommended height for the handicapped.

Suggested Mounting Heights from floor to Bottom of Dryer

	Hand Dryers	Hair Dryers
Men's	40" (102 cm.)	64" (163 cm.)
Ladies'	38" (97 cm.)	58" (147 cm.)
Teenagers'	36" (91 cm.)	56" (142 cm.)
Children	30" (76 cm.)	43" (109 cm.)
Handicapped	32" (81 cm.)	45" (114 cm.)